

DUCHESNE COUNTY MONUMENT SURVEY RECORD

T1N R1W




SEC 29

1/4

SEC 32

U.S.B.&M.

E-7

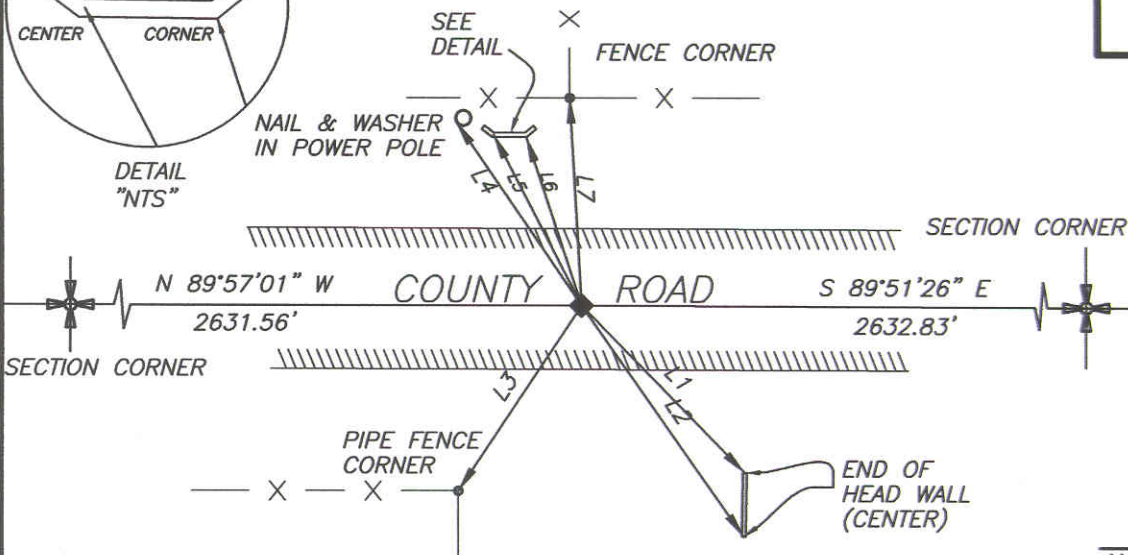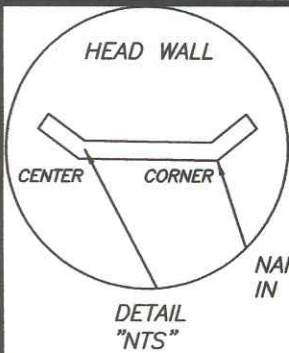

SCALE; 1"=30'



LINE	BEARING	DISTANCE
L1	S 44°32'51" E	36.63'
L2	S 35°16'30" E	44.20'
L3	S 33°50'34" W	34.87'
L4	N 34°27'02" W	34.82'
L5	N 27°19'14" W	30.09'
L6	N 18°09'44" W	27.69'
L7	N 03°07'32" W	32.52'

DESCRIPTION OF CORNER EVIDENCE FOUND

POSITION OF CORNER DETERMINED BY PREVIOUS SURVEY

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THE CORNER

SET MONUMENT SPIKE WITH BRASS WASHER

REFERENCED AS SHOWN


STATE PLANE COORDINATE DATA

CERTIFICATION

I Jerry D. Allred, Professional Land Surveyor, State of Utah, do hereby certify that I have performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve same

Date 2 Dec 2004

Jerry D. Allred, Professional Land Surveyor
Certificate No. 148951
Duchesne County Surveyor

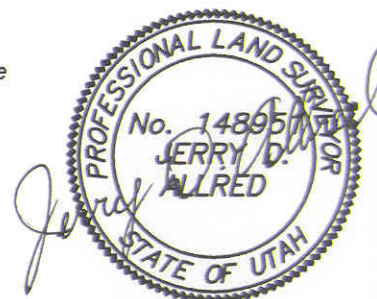

SCANNED 14 DEC 2004